

DESIGN

The SPECIAL MARKET range of rotisseries have been designed with performance, practicality and mobility in mind. Light weight and compact they are the ideal rotisserie for markets and food trucks and offer a rapid output together with cooking quality.

Conscious of the cost involved for our clients, the SPECIAL MARKET rotisserie has energy saving infrared burners, patented by Rotisol, that enables the rapid roasting of a variety of products.

FEATURES

- Independent motors
- Spits with Bakelite handles
- Optional lighting
- Independent infrared burners with interchangeable ceramic bricks
- 2 tempered glass doors (removable for transport)
- Optional personalised removable roof signage
- Equipped with bottom drip tray with drainage tap

FINISHES

Standard model in finished STAINLESS STEEL. A choice of front coloured panels are available







Black front panels and stainless steel finish



ACCESSORIES

A variety of accessories are available for the unit. Video of available accessories.

| CUI1425 Anti-cutting prongless spit. | | BP1425 Chicken spit. | - EFFT | BRC1425 Basket spit. | |
|--|--------|---|--------|---------------------------------------|---|
| BS1425 Sabre spit for ham / turkey. | -E-F-F | BRRO1425 Roast-clamp spit. | - | BA1425 Lamb/suckling- pig spit. | |
| BCR1425 Spatchcock chicken spit. | | GSV1425 Raised rack for meat storage. | | DEC Spit mover. | N |



SPECIAL MARKET


1425.8SMG/SMiG

Front view Rotisserie with roof (optional) and base on casters (optional)

Side view Rotisserie with roof (optional) and base on casters (optional)

Top view Rotisserie with roof (optional) and base on casters (optional)

115

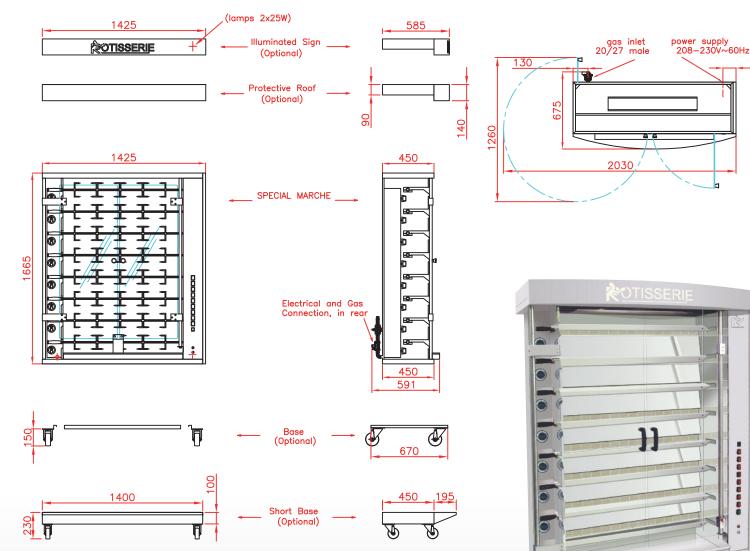

SPECIFICATIONS

| Gas Power | Natural : 121000 BTU/h ; Propane : 110000 BTU/h. | | |
|----------------------|---|--|--|
| Gas minimum pressure | Natural : 17,4 mbar. Propane : 27,4 mbar. | | |
| Gas connector | ³ ⁄ ₄ " male | | |
| Electricity | 208-230 Volts 1 phase + neutral + earth | | |
| Capacity | 40/48 poultries (depending on size) | | |
| Warrantly | 1 year parts and labor | | |
| Venting | Hood installed conformly with all local codes | | |
| Minimum clearance | 2 ^{1/2} " on the right, left and rear side | | |
| Shipping weight | 225 kg | | |

Revised : January 2017

.

Rotisol S.A.S.

Zone industrielle La Trentaine, Avenue Gustave Eiffel 77507 Chelles cedex - FRANCE s.bennell@rotisol.com - Tel : +33 1 64 21 80 00 www.rotisol.com

Celco Inc.

www.celco.ca

585 Secretariat Court, Mississauga, Ontario, L5S 2A5 (905) 364-5200 1-866-77CELCO (23526) info@celco.ca

1425.8SMiG

Stainless steel finish