

REFRIGERATED CHEF BASES



Model SKRCB38H (Shown)



Silver King® is the leader in reliable and energy efficient refrigeration solutions. Our sleek, stainless steel Chef Bases are made with the highest quality materials to guarantee everything is kept fresh and meets temperature standards. Our Chef Bases have polyurethane insulation for maximum strength and durability, and minimal energy waste.




MODELS

SKRCB38H	38" Refrigerated Storage Stand w/ 2 drawers	12" x 20" Pan Capacity—4
SKRCB50H	50" Refrigerated Storage Stand w/ 2 drawers	12" x 20" Pan Capacity—6
SKRCB60H	60" Refrigerated Storage Stand w/ 2 drawers	12" x 20" Pan Capacity—6
SKRCB79H	79" Refrigerated Storage Stand w/ 4 drawers	12" x 20" Pan Capacity—10
SKRCB84H	84" Refrigerated Storage Stand w/ 4 drawers	12" x 20" Pan Capacity—10
SKRCB97HL	97" Refrigerated Storage Stand w/ 6 drawers	12" x 20" Pan Capacity—12

Standard Features

- Exterior stainless steel with galvanized back and bottom reduces risk of corrosion.
- Interior aluminum, with coved corners and finished edges for easy cleaning.
- Environmentally friendly polyurethane foamed-in-place insulation for maximum strength and durability.
- Full extension drawers. This premier slide and framework construction promotes lateral stability while offering high dynamic load capacities and a stay-shut feature. All drawers accommodate full size 12" x 20" x 6" deep hotel pans and deep fractional pans. Drawers lift out for cleaning.
- 8 foot 3 wire power cord standard.
- Santoprene™ gaskets last four times longer than the industry standard.
- CFC-free refrigerant, hermetically sealed, high efficiency, self contained refrigeration system with automatic defrost and forced air circulation.
- Casters supplied are heavy-duty, (two with locks) secured to a 12 gauge steel base to ensure years of worry free operation.
- Limited Warranty: 3-years from date of original equipment purchase on General Market refrigeration, 1-year labor, 90 day parts, and 5-year compressor warranty.*

Dimensions:

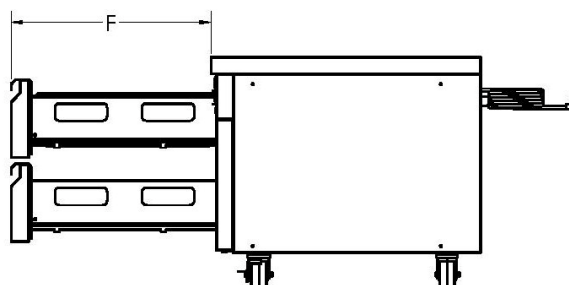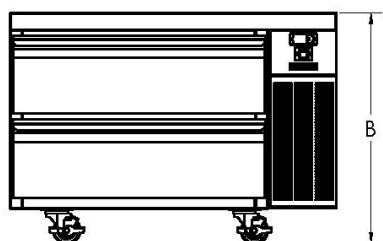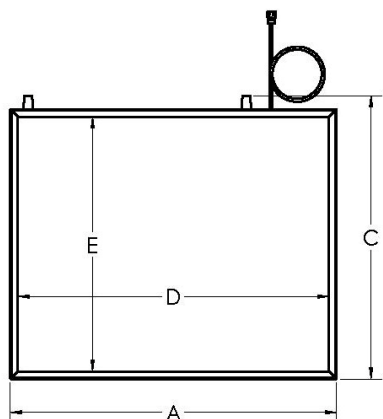

Model Number	Width "A" in (mm)	Height "B" in (mm)	Depth "C" in (mm)	Width "D" in (mm)	Depth "E" in (mm)	Depth "F" in (mm)
SKRCB38H	37.49 (952.35)	26.47 (672.42)	32.58 (827.53)	35.74 (907.87)	29.25 (742.92)	22.97 (583.45)
SKRCB50H	50.25 (1276.35)	26.47 (672.42)	32.58 (827.53)	48.50 (1231.87)	29.25 (742.92)	22.97 (583.45)
SKRCB60H	60.50 (1536.69)	26.47 (672.42)	32.58 (827.53)	58.74 (1492.10)	29.25 (742.92)	22.97 (583.45)
SKRCB79H	79.50 (2019.30)	26.47 (672.42)	32.58 (827.53)	77.74 (1974.51)	29.25 (742.92)	22.97 (583.45)
SKRCB84H	84 (2133.60)	26.47 (672.42)	32.58 (827.53)	82.24 (2088.81)	29.25 (742.92)	22.97 (583.45)
SKRCB97H						
SKRCB97HL	99.44 (2525.71)	26.47 (672.42)	32.58 (827.53)	97 (2463.80)	29.25 (742.92)	22.97 (583.45)

Specifications



Model Number	Country	Amps	Voltage	Hz	Plug	Gross Shipping Weight Lb (Kg)	Shipping Cu Ft (Cu Kg)
SKRCB38H	USA	2.5	115 VAC	60 Hz	NEMA 5-15P	285 (129.28)	27.77
SKRCB50H	USA	3.0	115 VAC	60 Hz	NEMA 5-15P	345 (156.49)	34.38
SKRCB60H	USA	3.0	115 VAC	60 Hz	NEMA 5-15P	395 (179.17)	41.25
SKRCB79H	USA	3.1	115 VAC	60 Hz	NEMA 5-15P	515 (233.60)	54.90
SKRCB84H	USA	3.1	115 VAC	60 Hz	NEMA 5-15P	565 (256.28)	57.48
SKRCB97H							
SKRCB97HL	USA	3.1	115 VAC	60 Hz	NEMA 5-15P	715 (324.32)	65.88

Certifications





**MORE PANS
DEEPER PANS
UP TO 125% MORE CAPACITY**