




Freezer

MODEL SKF72D



Pans not included

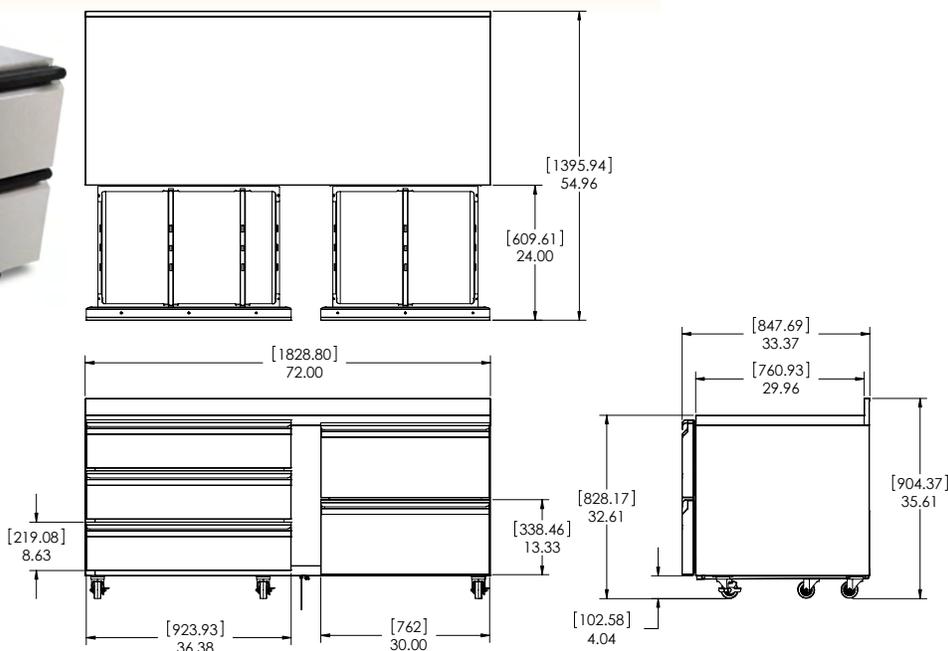

MODEL	LENGTH	DEPTH	HEIGHT	COMPRESSOR	AMPS	WEIGHT
SKF72D	72"	33 5/8"	35.91"	1/2 hp	11.2	645 lbs.

EXTERIOR	Heavy duty work top with back splash and welded corners, stainless steel, galvanized back and bottom.
INTERIOR	Aluminum, coved corners and finished edges for ease of cleaning.
INSULATION	Environmentally friendly polyurethane foamed-in-place for maximum insulation, strength and durability.
DRAWERS	Full extension drawers with drawer slides welded to heavy gauge stainless steel frame work. This premier slide and framework construction promotes lateral stability while offering high dynamic load capacities and a stay-shut feature. The three left side drawers accommodate two 12" x 20" plus one 6" x 20" hotel pans, 4" deep. The two right side drawers accommodate two 12" x 20" hotel pans, 6" deep. Drawers lift out for cleaning.
CASTERS	Supplied with six heavy duty plate casters (three with locks).
REFRIGERATION	CFC-free, 404A refrigerant, hermetically sealed, high efficiency, self contained refrigeration system automatic defrost and forced air circulation. Adjustable temperature control mounted in front for easy access. Automatic condensate evaporator means no plumbing or floor drains.
DRAWER GASKETS	Santo Prene material lasts four times industry standard.
ELECTRICAL	Standard as 115 volt, 60Hz, single phase operation. 8 foot 3-wire power cord with NEMA 5-15 plug.
LISTINGS	ETL Safety (U.S. and Canada), ETL Sanitation.
WARRANTY	One year parts and labor warranty on cabinet and refrigeration system. Five year warranty on compressor and drawer slide assemblies.



1600 Xenium Lane North
 Minneapolis, MN 55441-3787
 Phone (763) 923-2441
 Fax (763) 553-1209
 www.silverking.com



Specifications subject to change without notice.

1/2014
 © Silver King 2014
 Printed in U.S.A.