

SPECIFICATION ELEGANCE GAS

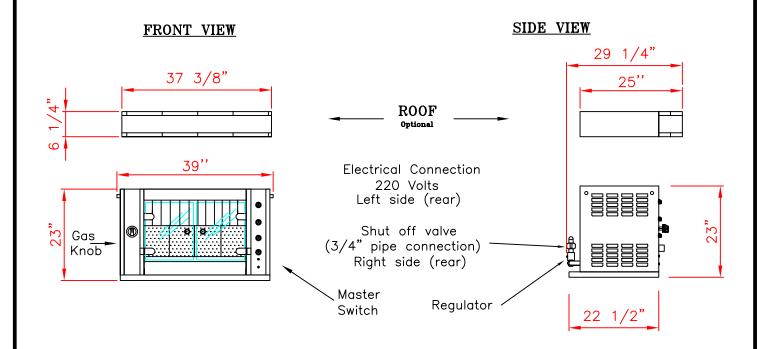



DIMENSION (inches)				GAS CONNECTION	
	WIDTH	HEIGHT	DEPTH	- pipe ; 3/4", non corrugated flexible quick diconnect recommended - Consumption : 28,000 Btu/h (natural) 25,000 Btu/h (propane) - Minimum pressure : 7" WC	
1-rotisserie	39	23	22 1/2		
			CONNECTION		
2-roof	37 3/8	6 1/4	25	- Standard : 750 W/ 220V/ 1 phase/ 3.5 Amps	
1+2	39	29 1/4	29 1/4	1 Electrical cable : 78" length the plug is not provided	
VENTILATION REQUIREMENTS					
A type 1 hood is required. Hood and ventilation system sould be installed and maintained in accordance with NFPA 96, and all relevant nationnal and locals codes. Solid—fuel cooking equipment must be vented separately from equipment that is not fired by solid—fuel. A minunimum dimensions enclosure are as follows:52" width , 42" Depth				WEIGHT	NOTE
				Roof: 40 LbsRotisserie: 288 LbsPacking: 50 Lbs	- Nb of motors: 2 - Nb of burners: 1 - Nb of spits: 2 - Nb of glass doors: 2 - Nb of halogen lamps: 1

NOTE: Specifications, design and features are subject to change without notice.

WARRANTY CONDITIONS:

rotisol warrants its equipment to be free from defects in material and workmanship. the warranty covers parts for one year and lobor for 6 months. repairs must be performed by an authorized service company and it is the responsability of the customer to return the defective parts to rotisol france, inc. within 15 days(otherwise, the warranty will not be honored). the shipping charges for replacement parts, other than ground, will be at the customer's expense. this arranty does not cover glass door breakage and quartz or halogene lamp breakage, neither does it cover a mechanical parts. this warranty does not apply to dammages by accident, incorrect line voltage, fire, water, or other acts or god.