



Item: _____

Quantity: _____

Project: _____

BROILER-THERMO GRIDDLE COMBINATION

Delux Series

Models: BG-1512 BG-1524 BG-1536 BG-2412 BG-2424 BG-2436
 BG-3612 BG-3624 BG-4812 BG-4824 BG-6012



BG-2424

Gas Type: Natural LP

Elevation (if above 2000 ft.): _____

Standard Features

- Fully welded frame with lifetime warranty
- 1,200°F mineral wool insulation
- Stainless steel drip tray/grease can
- Stainless steel sides and front valve cover
- 4" high adjustable heavy duty legs included

BROILER-DRB

- Easily removable and replaceable independent firebox assembly on broiler
- Heavy cast iron burners rated at 11,000 BTU/hr every 6"
- Heavy cast iron radiants
- Cast iron top grates

GRIDDLE- GT

- Special steel tubular burner rated at 12,000 BTU/hr every 6"
- 1" thick griddle plate with polished cooking surface
- Energy saving electromechanical thermostat is adjustable from 150°-450° F every 12"


Options and Accessories

- 3/8" round steel rod grate, non-adjustable height (fish, chicken, steak & veg.)
 - 3/8" round stainless steel rod grate, non-adjustable height (fish, chicken, steak & veg.)
 - 3/8" square steel rod grate, non-adjustable height (all uses)
 - 3/8" square stainless steel rod grate, non-adjustable height (all uses)
 - Cast iron criss cross (diamond) grates, non-adjustable height (all uses)
 - Stainless Steel Equipment Stand
 - Knock Down All Welded
- Size**
- 18" 24" 30" 36" 48" 60" 72"
 - 5" swivel casters (set of four - 2 locking)
 - 5" swivel casters (set of six- 3 locking for 60" and 72" stands)



2 YEAR LIMITED, PARTS AND LABOR WARRANTY

BROILER-THERMO GRIDDLE COMBINATION

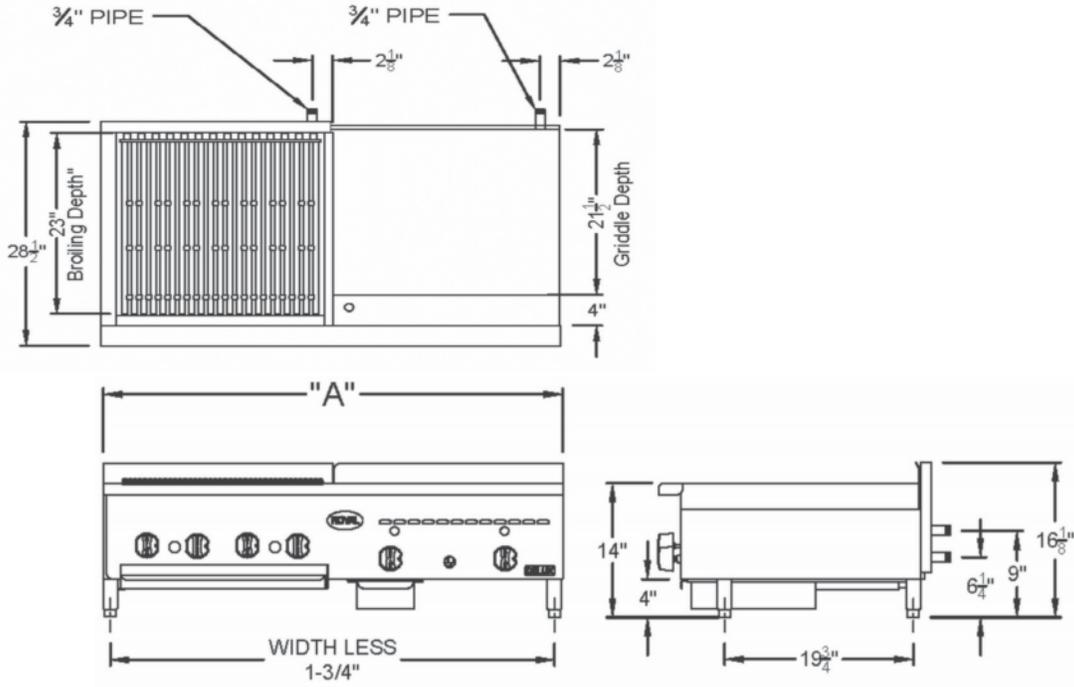

Model Number	Total BTU	Broiler	Griddle	Ship Weight
BG-1512	53,000	15"	12"	325 lbs.
BG-1524	77,000	15"	24"	385 lbs.
BG-1536	101,000	15"	36"	470 lbs.
BG-2412	82,000	24"	12"	353 lbs.
BG-2424	106,000	24"	24"	460 lbs.
BG-2436	130,000	24"	36"	557 lbs.
BG-3612	111,000	36"	12"	448 lbs.
BG-3624	135,000	36"	24"	540 lbs.
BG-4812	140,000	48"	12"	570 lbs.
BG-4824	164,000	48"	24"	645 lbs.
BG-6012	169,000	48"	12"	616 lbs.

Gas Connection:

3/4" NPT on the right hand rear of the appliance.
The pressure regulator (supplied) is to be connected by the installer.

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Gas Pressure:

5" W.C.	Natural Gas
10" W.C.	Propane

Clearances: For installation in non combustible locations only

	Combustible	Non-Combustible
Rear	N/A	0"
Sides	N/A	0"

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.
3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com