



RÔTISSERIE

## SPECIAL-MARKET 1425.6SMG/SMiG

### DESIGN

The SPECIAL MARKET range of rotisseries have been designed with performance, practicality and mobility in mind. Light weight and compact they are the ideal rotisserie for markets and food trucks and offer a rapid output together with cooking quality.

Conscious of the cost involved for our clients, the SPECIAL MARKET rotisserie has energy saving infrared burners, patented by Rotisol, that enables the rapid roasting of a variety of products.

### FEATURES

- ☐ Independent motors
- ☐ Spits with Bakelite handles
- ☐ Optional lighting
- ☐ Independent infrared burners with interchangeable ceramic bricks
- ☐ 2 tempered glass doors (removable for transport)
- ☐ Optional personalised removable roof signage
- ☐ Equipped with bottom drip tray with drainage tap

### FINISHES

Standard model in finished STAINLESS STEEL. A choice of front coloured panels are available



**1425.6SMG**

Black front panels and stainless steel finish






### ACCESSORIES

A variety of accessories are available for the unit. Video of available [accessories](#).

<b>CUI1425</b> Anti-cutting prongless spit.		<b>BP1425</b> Chicken spit.		<b>BRC1425</b> Basket spit.	
<b>BS1425</b> Sabre spit for ham / turkey.		<b>BRRO1425</b> Roast-clamp spit.		<b>BA1425</b> Lamb/suckling- pig spit.	
<b>BCR1425</b> Spatchcock chicken spit.		<b>GSV1425</b> Raised rack for meat storage.		<b>DEC</b> Spit mover.	

## Front view

Rotisserie with roof (optional)  
and base on casters (optional)

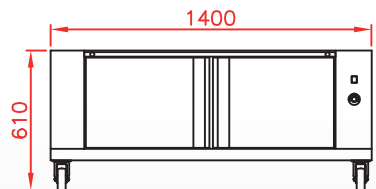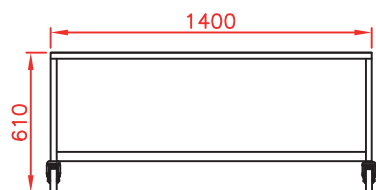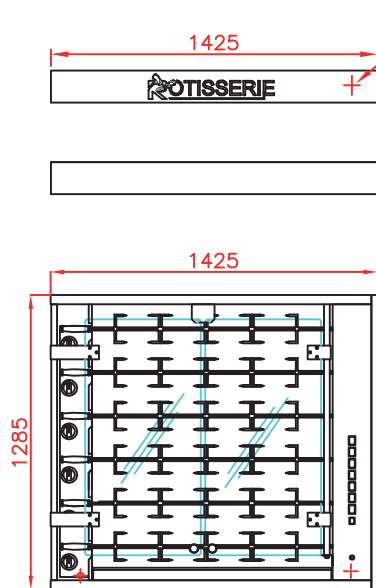

(lamps 2x25W)

Illuminated Sign  
(Optional)

Protective Roof  
(Optional)

SPECIAL MARCHE




Electrical and Gas  
Connection, in rear

Caster Base  
(Optional)

Heated Base Cabinet  
or  
Base Cabinet  
(Optional)


## Side view

Rotisserie with roof (optional)  
and base on casters (optional)

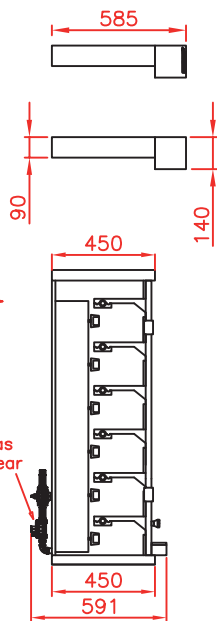

## Top view

Rotisserie with roof (optional)  
and base on casters (optional)

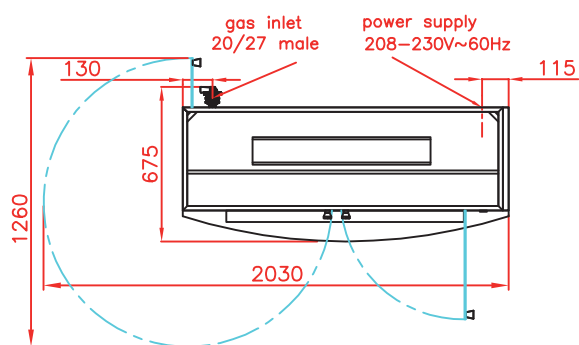

**1425.6SMiG**

Stainless steel finish



## SPECIFICATIONS

<b>Gas Power</b>	Natural : 91000 BTU/h ; Propane : 83000 BTU/h.
<b>Gas minimum pressure</b>	Natural : 17,4 mbar. Propane : 27,4 mbar.
<b>Gas connector</b>	¾" male
<b>Electricity</b>	208-230 Volts 1 phase + neutral + earth
<b>Capacity</b>	30/36 poultries (depending on size)
<b>Warranty</b>	1 year parts and labor
<b>Venting</b>	Hood installed conformly with all local codes
<b>Minimum clearance</b>	21½" on the right, left and rear side
<b>Shipping weight</b>	170 kg

Revised : January 2014

CANADA DISTRIBUTOR

**Rotisol S.A.S.**

Zone industrielle La Trentaine, Avenue Gustave Eiffel  
77507 Chelles cedex - FRANCE

[s.bennell@rotisol.com](mailto:s.bennell@rotisol.com) - Tel : +33 1 64 21 80 00

[www.rotisol.com](http://www.rotisol.com)

**Celco Inc.**

[www.celco.ca](http://www.celco.ca)

585 Secretariat Court, Mississauga, Ontario, L5S 2A5

(905) 364-5200 1-866-77CELCO (23526) [info@celco.ca](mailto:info@celco.ca)