



Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Project: \_\_\_\_\_

## ***Delux Series***

Models: ☐ GB-24    ☐ GB-36    ☐ GB-48



GB-36

Gas Type: ☐ Natural    ☐ LP

Elevation (if above 2000 ft.): \_\_\_\_\_

### **Standard Features**




- Fully welded frame with lifetime warranty
- 1,200°F mineral wool insulation
- Stainless steel front and sides
- 10,000 BTU/hr cast burner with heat-radiating stainless steel mesh
- Full width, removable stainless steel crumb pan for easy cleaning
- 3/4" thick griddle plate with polished cooking surface
- Three position pull out broiler rack
- Standing pilots for instant safe ignition
- Easy loading and unloading with a roll-out carriage
- 4" high adjustable heavy duty legs included

MANUAL GRIDDLE/ OVER-FIRED BROILER



**2 YEAR LIMITED, PARTS AND LABOR WARRANTY**

# MANUAL GRIDDLE/ OVER-FIRED BROILER

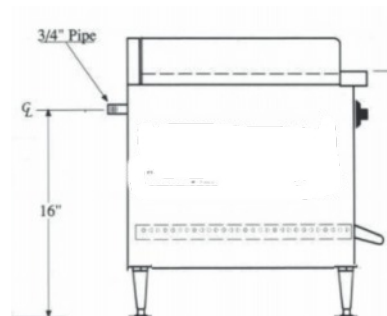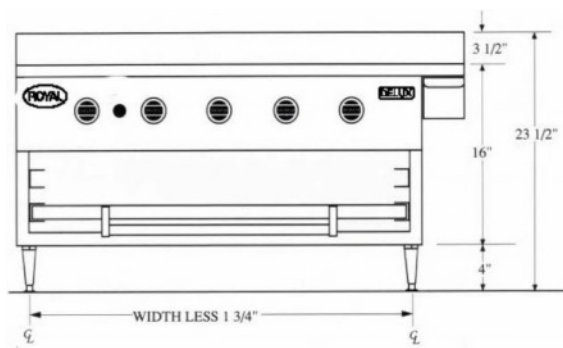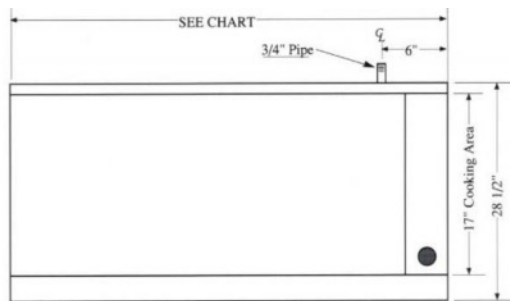

| Model Number | Width (A) | Number of Burners | Total BTU | Ship Weight |
|--------------|-----------|-------------------|-----------|-------------|
| GB-24        | 28"       | 3                 | 30,000    | 200 lbs.    |
| GB-36        | 40"       | 5                 | 50,000    | 280 lbs.    |
| GB-48        | 52"       | 7                 | 70,000    | 394 lbs.    |

## Notes:

1.

## Gas Connection:

3/4" NPT on the right hand rear of the appliance.

The pressure regulator (supplied) is to be connected by the installer.

## Gas Pressure:

|          |             |
|----------|-------------|
| 5" W.C.  | Natural Gas |
| 10" W.C. | Propane     |

## Clearances:

|       | Combustible | Non-Combustible |
|-------|-------------|-----------------|
| Rear  | 4"          | 0"              |
| Sides | 4"          | 0"              |

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

## Royal Range of California, Inc.

3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600  
Fax: (951) 360-7500 • [www.royalranges.com](http://www.royalranges.com) • [sales@royalranges.com](mailto:sales@royalranges.com)