

Item:	
Quantity:	
Project:	

Delux Series

Models: ☐ RFT-75-2-XX ☐ RFT-75-3-XX ☐ RFT-75-4-XX ☐ RFT-75-5-XX



RFT-75-2-EM

Standard Features

- Fully welded frame with lifetime warranty
- 75 lb capacity each per stainless steel tank
- Frying area each tank: 18" x 18"
- 8 gpm filter pump with 6' power cord
- Shortening returns through wash hose
- All welded stainless steel cabinet
- Cast iron burners rated at 38,000 BTU/hr each
- Millivolt control system with 100% safety shut off
- Thermostatic control with 200°-400° F range
- Twin fry baskets each tank with plastic coated handles for ease of handling
- 1¼" full port drain valve each tank
- Casters
- 25 sheets of filter paper
- Five year limited (prorated) warranty on S/S tank

Gas Type: Natural LP
Elevation (if above 2000 ft.):
EM - Electro mechanical thermostat (200°-400° F)
DM2 - Two channel solid state digital control with melt cycle
CM - 8 product computer control with individual programming capabilities for temperature and

** Includes a performance check by a certified food service technician

Options and Accessories

□ Royal Plus Filtration- Shortening returns thru the bottom of tank
 □ Royal Ultra-Plus Filtration- Shortening


returns thru the bottom of tank and thru the


- ☐ SDS- Rear oil disposal port
- ☐ Fine mesh crumb screen with handle
- ☐ Triple filtration for heavy breading products
- ☐ Permafil filter screen in lieu of paper
- ☐ Stainless-steel tank cover
- ☐ Stainless-steel side splash guard
- ☐ Filter tub cover

wash hose

- Dump station with heat lamp
- 100 pack of filter paper
- 5" swivel casters
- ☐ 48" quick disconnect and restraining cable



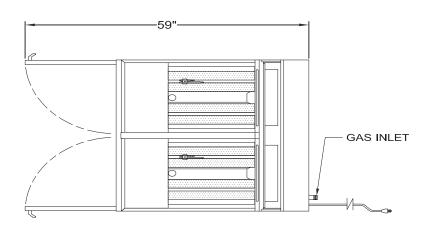

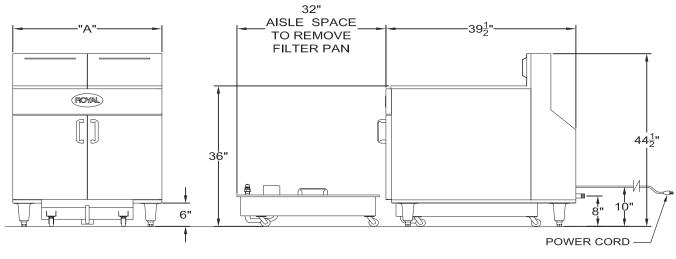

Model Number	Width "A"	Cooking Area Each Tank	Number of Burners/Tank	Total BTU Each Tank	Ship Weight
RFT-75-2-XX	39"	18" x 18"	4	152,000	580 lbs.
RFT-75-3-XX	58.5"	18" x 18"	4	152,000	765 lbs.
RFT-75-4-XX	78"	18" x 18"	4	152,000	945 lbs.
RFT-75-5-XX	97.5"	18" x 18"	4	152,000	1,125 lbs.

For dump station add 19.5" to width

Filter Electrical Requirements, 50/60 Hz:

Volt / Phase	Amps
115V, 1PH	7 + .5 per tank

Gas Connection:

3/4" 1-2 tanks, 1 1/4" 3+ tanks NPT on the rear of fryer.

No external pressure regulator required.

Specify type of gas and altitude, if over 2,000 feet, when ordering

Gas Pressure:

4" W.C.	Natural Gas
11" W.C.	Propane

Clearances:

	Combustible	Non-Combustible
Rear	6"	0"
Sides	6"	0"

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.