





Features

- Produces clear, long-lasting gourmet cubes.
- Space-saving 181/4 in. (467 mm) wide under-counter design.
- Produces up to 121 lbs. (55 kg) of ice per day.
- Constructed from sturdy, corrosion-resistant stainless steel and fingerprint-proof plastic.
- · Ideal for any under-counter or bar application.
- Contemporary, elegant design.
- Environmentally friendly R290A refrigerant.

Space-Saving Solutions

- Front air discharge design for compact spaces.
- · Low profile top saves counter space.
- Fits under compliant counters.
- Stores up to 48 1/2 lbs. (22 kg) of ice.
- Easy front access to ice.
- Removable Air Filter.

Options & Accessories

WATER FILTERS				
lce Machine Model	Man	Inline		
	System	Replacement	System	
UCG13OA	IFQ1-S	IOMQ-S	IF14C / IF18C	

Ice Maker Warranty

Every UCG Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.


• Three years parts and labor.

Ice Form



GOURMET ICE


GOURMET ICE DIMENSIONS		
Height	1.2" (30.5 mm)	
Diameter	1.35" (34.25 mm)	

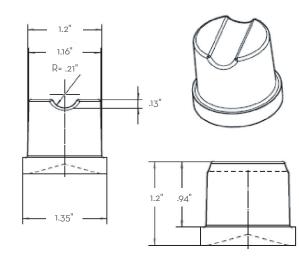



UCG130A GOURMET SERIES UNDERCOUNTER



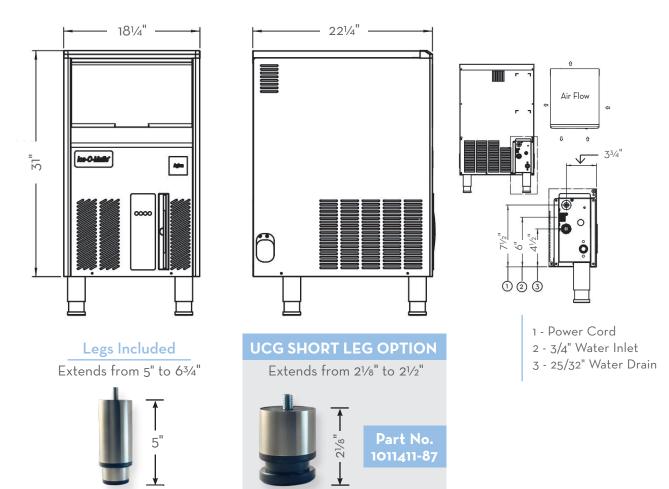

Dimensions

MODELS		LEGS INCLUDED	UCG SHORT LEG OPTION	
W x D x H (in.)	*18 ¹ /4 x 22 ¹ /4 x 31	18¼ x 22¼ x 36 (min) 18¼ x 22¼ x 37¾ (max)	18¼ x 22¼ x 33¼ (min) 18¼ x 22¼ x 33½ (max) COST OPTION	
W x D x H (mm)	*464 x 565 x 788	464 x 565 x 915 (min) 464 x 565 x 959 (max)	464 x 565 x 842 (min) 464 x 565 x 851 (max) COST OPTION	

* Dimensions do not account for Included or UCG Short Leg Option.

Specifications

			duction 24hrs			kWH Used per 100 lbs	
Model Number	Cond. Unit	70°F (21°C) air/ 50°F (10°C) water lbs (kg)	90°F (32°C) air/ 70°F (21°C) water lbs (kg)	Storage Capacity Ibs (kg)	Water Consumption gal/hr	(45 kg) of ice @ 90°F (32°C) air/ 70°F (21°C) water	Voltage Characteristics
UCG13OA	Air	121 (55)	112 (51)	48.5 (22)	1.35	9.0	115/60/1

NOTES: Approx. Shipping Weight lbs (kg): 97 (44)

Refrigerant Type: R29OA

All specifications and performance data are subject to normal manufacturing variances.

Ice-O-Matic reserves the right to change the specifications at any time without obligation. Certifications may vary depending on country of origin.

Operating Requirements

MINIMUM		
	60 Hz	
Ambient Temp. Range Air	50°F (10°C)	109°F (43°C)
Water Temp.	41°F (5°C)	100°F (38°C)
Water Pressure	14 PSI (1 BAR)	70 PSI (5 BAR)
Electrical Voltage	115V/60Hz/1ph	