



RÔTISSERIE

## PERFORMANCES

1400.8PG/PiG

### DESIGN

The PERFORMANCES range of rotisseries have been especially designed for volume cooking with high output, speed and cooking quality.

Well designed, user friendly and reliable the PERFORMANCES is used by leading supermarkets and chain restaurants throughout the world.

Conscious of the cost involved for our clients, the PERFORMANCES rotisserie has energy saving infrared burners, patented by Rotisol, that enables the rapid roasting of a variety of products.

### FEATURES

- ☐ Independent motors
- ☐ Optional lighting
- ☐ Removable inner side panels for cleaning
- ☐ Independent infrared burners with interchangeable ceramic bricks
- ☐ 4 tempered glass doors
- ☐ Optional personalised removable roof signage
- ☐ Equipped with bottom drip tray with drainage tap

### FINISHES

Standard model in finished STAINLESS STEEL. A choice of front coloured panels are available.



1400.8PG



Black front panels and stainless steel finish



### ACCESSORIES

A variety of accessories are available for the unit. Video of available [accessories](#) and video of [vertical spit system](#).

|                                                   |  |                                      |  |                                              |  |
|---------------------------------------------------|--|--------------------------------------|--|----------------------------------------------|--|
| <b>CUI1400</b><br>Anti-cutting<br>prongless spit. |  | <b>BP1400</b><br>Chicken spit.       |  | <b>BRC1400</b><br>Basket spit.               |  |
| <b>BS1400</b><br>Sabre spit for<br>ham / turkey.  |  | <b>BRRO1400</b><br>Roast-clamp spit. |  | <b>BA1400</b><br>Lamb/suckling-<br>pig spit. |  |
| <b>BCR1400</b><br>Spatchcock<br>chicken spit.     |  | <b>DEC</b><br>Spit mover.            |  | <b>AT</b><br>Gas lighter.                    |  |

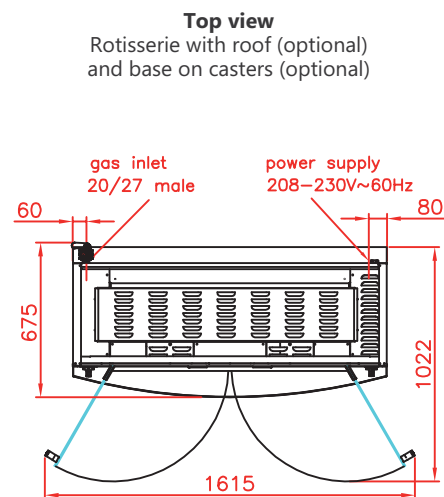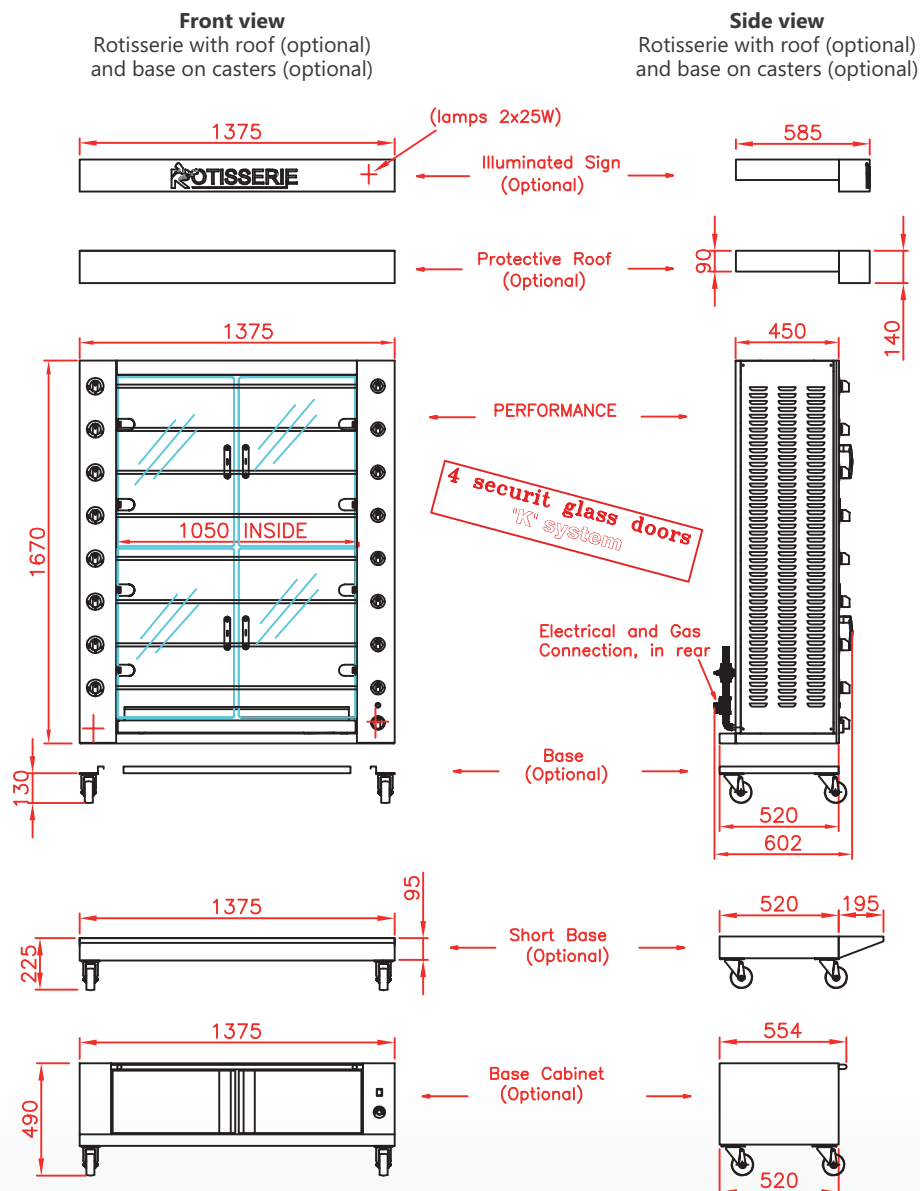

**1400.8PiG**

Stainless steel finish



## SPECIFICATIONS

|                             |                                                  |
|-----------------------------|--------------------------------------------------|
| <b>Gas Power</b>            | Natural : 121000 BTU/h ; Propane : 110000 BTU/h. |
| <b>Gas minimum pressure</b> | Natural : 17,4 mbar. Propane : 27,4 mbar.        |
| <b>Gas connector</b>        | 3/4" male                                        |
| <b>Electricity</b>          | 208-230 Volts 1 phase + neutral + earth          |
| <b>Capacity</b>             | 40/48 poultries                                  |
| <b>Warranty</b>             | 1 year parts and labor                           |
| <b>Venting</b>              | Hood installed conformly with all local codes    |
| <b>Minimum clearance</b>    | 21/2" on the right, left and rear side           |
| <b>Shipping weight</b>      | 240 kg                                           |

Revised : February 2017

CANADA DISTRIBUTOR

**Rotisol S.A.S.**

Zone industrielle La Trentaine, Avenue Gustave Eiffel

77507 Chelles cedex - FRANCE

[s.bennell@rotisol.com](mailto:s.bennell@rotisol.com) - Tel : +33 1 64 21 80 00

[www.rotisol.com](http://www.rotisol.com)

**Celco Inc.**

[www.celco.ca](http://www.celco.ca)

585 Secretariat Court, Mississauga, Ontario, L5S 2A5

(905) 364-5200 1-866-77CELCO (23526) [info@celco.ca](mailto:info@celco.ca)